GREENGUARD® LED LIGHTING

ITEM # 1810LC

NSF COMPONENT · GreenGuard® · c(UL)us

1810LC4000 LED FIXTURE

- Exceptionally energy-efficient lighting
- Surface mounting brackets
- Extremely durable polycarbonate housing and lens
- Designed for walk-in coolers and/or freezers
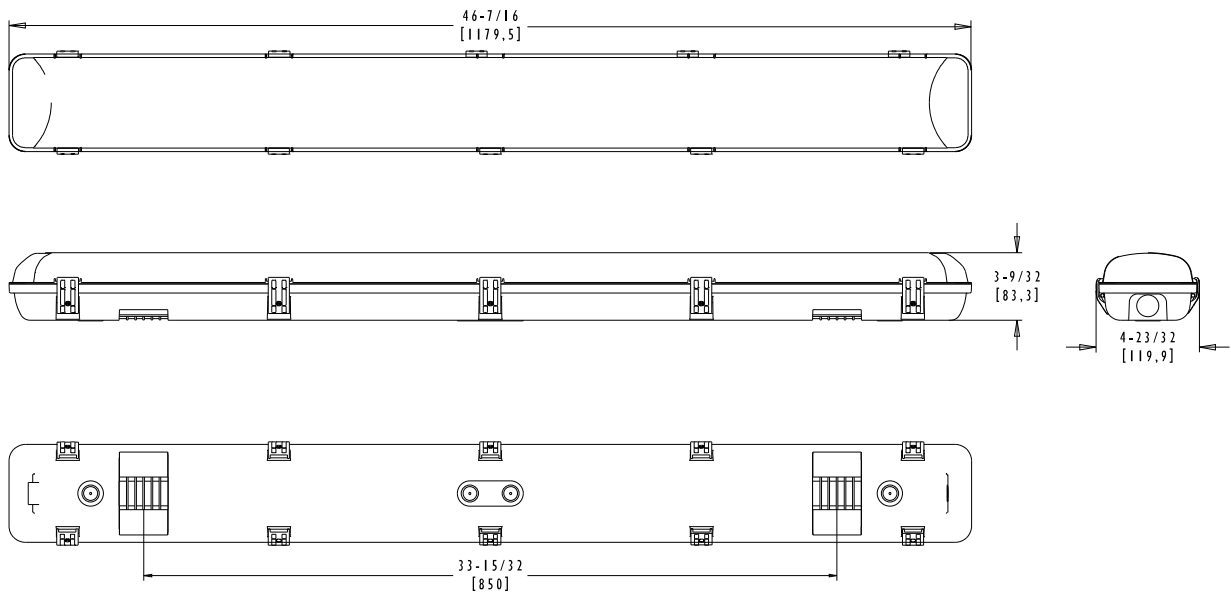- Operating temp -40°F to 104°F (-40°C to 40°C)
- Rated 50,000+ hours of life

SPECIFICATIONS

SIZE:
Nominal Overall Dimensions
46-7/16"L x 4-23/32"W x
3-9/32"H (1179,5 x 119,9 x
83,3 mm)

MATERIAL:
Diffuse: frosted UL approved
UL94-HB rated, PC
Housing: gray UL approved
UL94-5VA rated, PC
LED tray: white painted steel

POWER:
Watts: 40W
Volts: 120-277 VAC
Amps: 0.4 A @120VAC
PF: 0.99

LUMEN OUTPUT:
4550 Lumens
110 Lumens/Watt
Color Temp: 4000K
CRI: 84

CERTIFICATIONS:
UL approved for wet location
NSF listed component
IP-65

46-7/16 [1179,5]
3-9/32 [83,3]
4-23/32 [119,9]
33-15/32 [850]

Model No.	Item	Weight
11810LC4000	4FT LED Fixture, 40W 120-277 VAC	4.1 lbs./fixture

KASON®