




ITEM # 1810LX

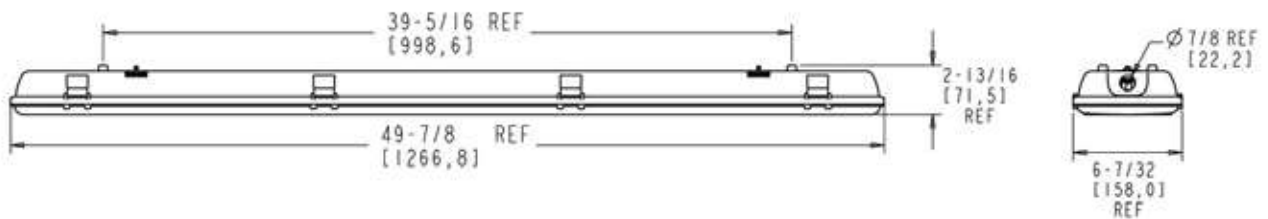

1810LX4000 LED FIXTURE

- High output LED technology with best-in-class efficiency
- Designed for high ceilings and larger work rooms with greater foot candle requirements
- LED technology assures sustainable energy savings over the life of the fixture. Four-foot, vaporproof fixture is supplied complete with low energy LEDs.
- Payback in as little as six months. Reduced lighting wattage and heat generation lower utility cost. LED fixtures are rated +50,000 hr./life. Find your specific savings using the Kason Payback Calculator (Kas-Calc).
- Specifically designed for wet and low temperature environments. Operating temperature range from -40°F to 104°F (-40°C to 40°C). Luminaire meets IP-65 for wet and cold applications and is LM-79 and LM-80 tested.
- Reach full light level immediately even in lowest temperatures.
- Easily replaces less energy-efficient lighting.

SPECIFICATIONS

SIZE
Nominal O.D. 48". Dimensions:
49-7/8"L x 6-7/32"W x 4-7/32"H
(1267 x 158 x 107mm)

HOUSING
Injection-molded polycarbonate with integral gasket

DIFFUSER
Clear, molded high impact polycarbonate diffuser; stainless steel latches for easy access to lamps

E-Z MOUNTING
Attach two, snap-in brackets to ceiling; snap fixture in place, and wire

POWER
120 - 277VAC @ 50/60 Hz (universal voltage); one hole provided with knockout at opposite end. Three knockouts on back. Complies with NEC regulations UL listed

37.7 W
0.33 Amps
4548 Lumens
120 Lumens/Watt

PRISON PACKAGE
Tamper resistant fastener kit option available

Model No.	Item	Weight
11810LX4000	4' LED Light Fixture	6.3 lbs./fixture
91810EZ0357	Tamper Resistant Latch Kit (Qty 8)	
91810LX040R	LED Tray Light Engine, 40W	
91810LX0852	Diffuser	
91810EZ0356	Latch Assembly (Pack of 8)	

NOTE: Rebates apply through local utility companies.

© 2019 Kason Industries, Inc.

0119 LIT 001